


# STANDARD CONNECTOR

with thermocouple material contacts; 200 °C

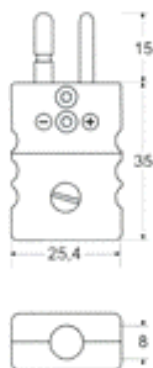

## Features:

- Heavy duty solid pins
- Can be colour coded to any national standard
- Polarized pins
- Internal easy access barriers prevent short circuit
- Captive single cover screw for easy connecting

## Specifications:

Body material	:	tough, self extinguishing cadmium free thermoplastic compound with low moisture absorption rate and good dielectric strength
Contacts	:	made of thermocouple material, plug with standard size solid pins, jacks spring loaded, contacts polarized
Max. temperature rating	:	200°C
Max. conductor diameter	:	2,0 mm
Max, cable diameter	:	8,0 mm
Identification	:	plus and minus sign moulded in body; connectors are colour coded to IEC or ANSI extension wire code
Accessories	:	Bush wire grip, Crimp Inserts, Wire Clamp Brackets, Mounting Brackets and Security Clip available. For our standard accessories see reverse side
Options	:	private label version for OEM accounts hollow pins lower cost also available in duplex version (white with coloured dot)

## Ordering code:

Thermocouple type	Plug	IEC	Jack	Plug	ANSI	Jack
Iron-constantan	CNN11100JBK	black	CNN12100JBK	CNN11100JBK	black	CNN12100JBK
Chromel-alumel	CNN11200KGR	green	CNN12200KGR	CNN11200KYL	yellow	CNN12200KYL
Copper-constantan	CNN11300TBR	brown	CNN12300TBR	CNN11300TBL	blue	CNN12300TBL
PtRh-Pt	CNN11400SOR	orange	CNN12400SOR	CNN11400SGR	green	CNN12400SGR
Chromel-constantan	CNN11500EPL	violet	CNN12500EPL	CNN11500EPL	violet	CNN12500EPL
Copper-copper*	CNN11600BGY	grey	CNN12600BGY	CNN11600BWH	white	CNN12600BWH
Nicrosil-nisil	CNN11700NPK	pink	CNN12700NPK	CNN11700NOR	orange	CNN12700NOR



**Thermo Electric**  
P.O. Box 179  
2740 AD Waddinxveen  
The Netherlands

Tel. : +31 (0)182 – 302 850  
Fax : +31 (0)182 – 302 777  
E-mail : info@thermo-electric.nl  
Internet : http://www.thermo-electric.nl

I/110  
Rev.00 08/03