


MINIATURE CONNECTOR

with thermocouple material contacts; 200 °C

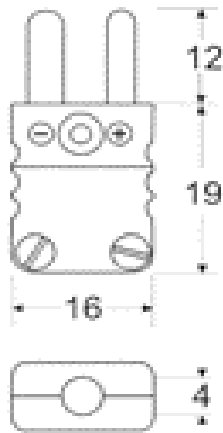

Features:

- Can be colour coded to any national standard
- Stackable design

Specifications:

Body material	:	tough, self extinguishing cadmium free thermoplastic compound with low moisture absorption rate and good dielectric strength
Contacts	:	fully captive, thermocouple material, plug with flat pins, jacks spring loaded, contacts polarized
Max. temperature rating	:	200°C
Conductor diameter	:	min. 0,12 mm max. 0,45 mm
Max. cable diameter	:	4,5 mm
Wire terminals	:	screw type for quick wiring
Identification	:	plus and minus sign moulded in body; connectors are colour coded to IEC or ANSI extension wire code
Accessories	:	each plug/jack will be supplied with a neoprene bush wire grip, code number CNN-29599; for other accessories see reverse side

Ordering code:

Thermocouple type	Plug	IEC	Jack	Plug	ANSI	Jack
Iron-constantan	CNN21100JBK	black	CNN22100JBK	CNN21100JBK	black	CNN22100JBK
Chromel-alumel	CNN21200KGR	green	CNN22200KGR	CNN21200KYL	yellow	CNN22200KYL
Copper-constantan	CNN21300TBR	brown	CNN22300TBR	CNN21300TBL	blue	CNN22300TBL
PtRh-Pt	CNN21400SOR	orange	CNN22400SOR	CNN21400SGR	green	CNN22400SGR
Chromel-constantan	CNN21500EPL	violet	CNN22500EPL	CNN21500EPL	violet	CNN22500EPL
Copper-copper*	CNN21600BGY	grey	CNN22600BGY	CNN21600BWH	white	CNN22600BWH
Nicrosil-nisil	CNN21700NPK	pink	CNN22700NPK	CNN21700NOR	orange	CNN22700NOR



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : http://www.thermo-electric.nl

I/120
Rev.00 08/03