


STANDARD PANEL

multi circuit; 200 °C

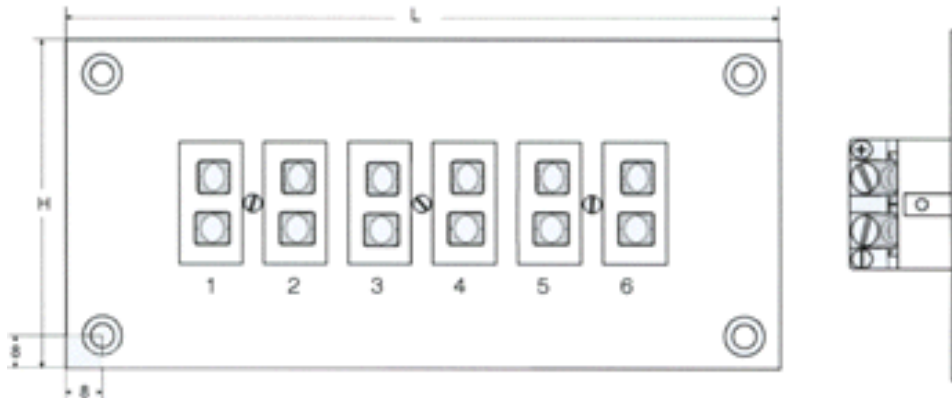

Specifications:

- Front panel : anodized aluminium 2,4 mm thick
- Construction : 6, 12, circuits in one row; 24 circuits in two rows of 12
- | Panel dimensions | A | B | Panel cut-out |
|------------------|--------|--------|---------------|
| 6 circuits | 146 mm | 67 mm | 117 x 42 mm |
| 12 circuits | 260 mm | 67 mm | 231 x 42 mm |
| 24 circuits | 260 mm | 115 mm | 231 x 86 mm |
- Depth behind panel : 20 mm
- Contacts : thermocouple material with offset screw terminals for easy wiring
- Max. temperature rating : 200 °C
- Max. conductor diameter : 2 mm
- Identification : each circuit numbered and insert colour coded to IEC or any other standard, polarity identified at the rear of the insert
- Mounting method : 4 holes with a diameter of 4,7 mm, centre 8 mm from each side
- Mating connector : any Thermo Electric standard size round pin plug
- These panels are also available on special order in high temp (350 °C) execution with stainless steel front plate.

Ordering code:

(for ANSI models, also available in IEC colours)

| Thermocouple type | ANSI | 6 circuits | 12 circuits | 24 circuits |
|--------------------|--------|-------------|-------------|-------------|
| Iron-constantan | black | PAN13106JBK | PAN13112JBK | PAN13124JBK |
| Chromel-alumel | yellow | PAN13206KYL | PAN13212KYL | PAN13224KYL |
| Copper-constantan | blue | PAN13306TYL | PAN13312TYL | PAN13324TYL |
| PtRh-Pt | green | PAN13406SGR | PAN13412SGR | PAN13424SGR |
| Chromel-constantan | violet | PAN13506EPL | PAN13512EPL | PAN13524EPL |
| Copper-copper | white | PAN13606BWH | PAN13612BWH | PAN13624BWH |
| Nicrosil-nisil | orange | PAN13706NOR | PAN13712NOR | PAN13724NOR |



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 888
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

I/305
Rev.00 08/03