


3 PIN STANDARD PANEL

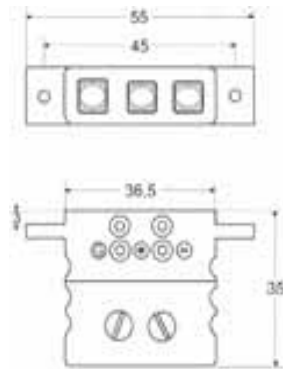

single circuit; 200 °C

Specifications:

Construction	:	glass filled thermoplastic body (Lugged insert)
Panel dimensions	:	55 x 12,8 mm
Panel cut-out	:	36,6 x 12,9 mm
Depth behind panel	:	30 mm
Contacts	:	thermocouple material; third contact high purity copper
Max. temperature rating	:	200 °C
Max. conductor diameter	:	2 mm
Identification	:	inserts colour coded to IEC or any other standard on the front, polarity and ground sign identified at the rear of the insert
Mounting method	:	2 latching screws from the front
Mating connector	:	Thermo Electric's 3 pin standard plug; see datasheet I/113

Ordering code:

Thermocouple type	Complete panel	IEC	Complete panel	ANSI
Iron-constantan	PAN85101JBK	black	PAN85101JBK	black
Chromel-alumel	PAN85201GR	green	PAN85201KYL	yellow
Copper-constantan	PAN85301BR	brown	PAN85301BL	blue
PtRh-Pt	PAN85401SOR	orange	PAN85401SGR	green
Chromel-constantan	PAN85501EPL	violet	PAN85501EPL	violet
Copper-copper	PAN85601BGY	grey	PAN85601BWH	white
Nicrosil-nisil	PAN85701NPK	pink	PAN85701NOR	orange



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : http://www.thermo-electric.nl

I/330
Rev.00 08/03