


MINIATURE PANEL

multi circuit; 200 °C

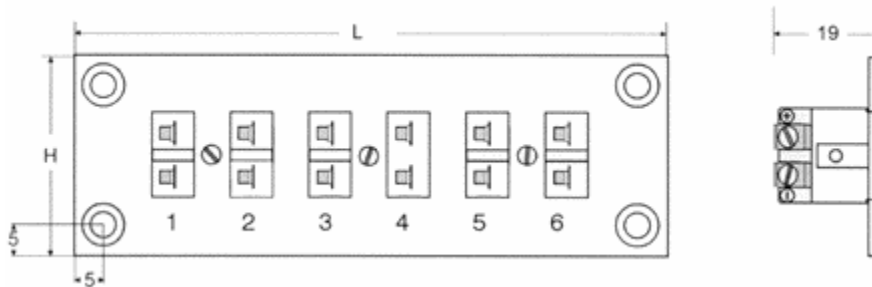

Specifications:

Front panel	:	anodized aluminium 2,4 mm thick			
Construction	:	6, 12, circuits in one row; 24 circuits in two rows of 12			
Panel dimensions		A	B	Panel cut-out	
		6 circuits	113 mm	38 mm	98 x 25 mm
		12 circuits	203 mm	38 mm	193 x 25 mm
		24 circuits	203 mm	76 mm	193 x 63 mm
Depth behind panel	:	19,3 mm			
Contacts	:	thermocouple material with screw terminals			
Max. temperature rating	:	200 °C			
Max. conductor diameter	:	0,6 mm			
Identification	:	each circuit numbered and insert colour coded to IEC or any other standard, polarity identified at the rear of the insert			
Mounting method	:	4 holes with a diameter of 4,5 mm, centre 5 mm from each side			
Mating connector	:	Thermo Electric's miniature flat pin plug, see datasheet I/120			

Ordering code:

(for ANSI models, also available in IEC colours)

Thermocouple type	ANSI	6 circuits	12 circuits	24 circuits
Iron-constantan	black	PAN23106JBK	PAN23112JBK	PAN23124JBK
Chromel-alumel	yellow	PAN23206KYL	PAN23212KYL	PAN23224KYL
Copper-constantan	blue	PAN23306TYL	PAN23312TYL	PAN23324TYL
PtRh-Pt	green	PAN23406SGR	PAN23412SGR	PAN23424SGR
Chromel-constantan	violet	PAN23506EPL	PAN23512EPL	PAN23524EPL
Copper-copper	white	PAN23606BWH	PAN23612BWH	PAN23624BWH
Nicrosil-nisil	orange	PAN23706NOR	PAN23712NOR	PAN23724NOR