


FLANGED BAR STOCK THERMOWELLS

with parallel stem

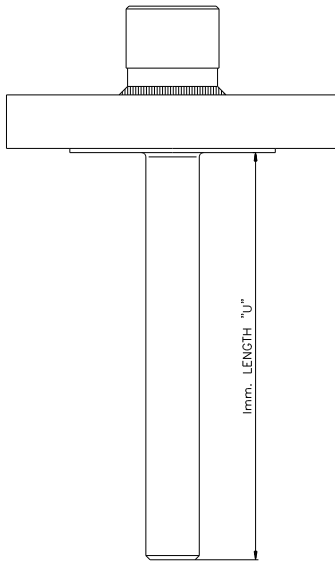

Specifications:

Series	:TWE-13.000
Type	:straight, from bar stock, flange welded on both sides to thermowell (un-machined)
Material	:SS 304 or SS 316
Internal thread	:1/2" NPT
Flange size, rating and material	:to be specified
Bar stock diameter	32 mm
Stem diameter	19 mm ^{+0,5} ₋₀
Surface finish	1 µm (40 Ru)
Bore	7 mm or 10 mm ^{+0,1} _{-0,1}
Eccentricity	10% of wall thickness max.
Tip thickness	4 mm ^{+1,5} ₋₀
Immersion length 'U'	to be specified; replace box in ordering code with your required length
Total well length	: "U" plus 50 mm

Test wells can be supplied with brass or stainless steel plug and chain; please specify when ordering.

Ordering code:

Bore ø

7 mm
10 mm

SS 304

	'U'	Flange
TWE-13701	-□ mm-□	
TWE-13011	-□ mm-□	

SS 316

	'U'	Flange
TWE-13702	-□ mm-□	
TWE-13012	-□ mm-□	