


3 PIN MINIATURE CONNECTOR

with thermocouple material contacts; 200 °C

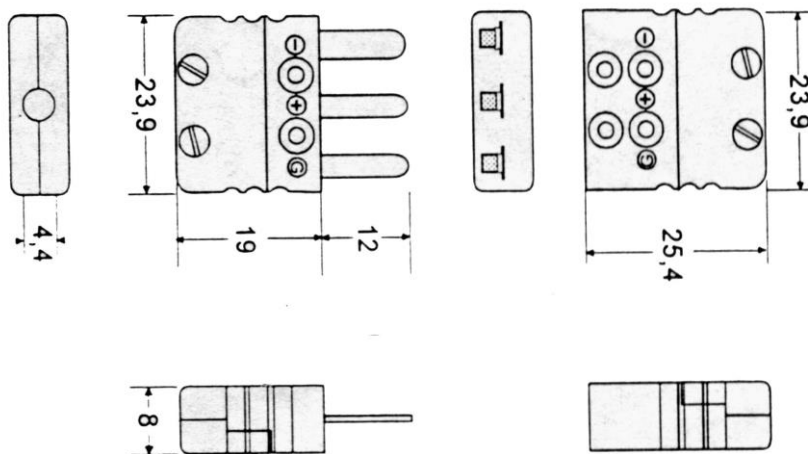

Features:

- Can be colour coded to any national standard
- Stackable design
- Also available as lugged panel insert
- Including earthing contacts

Specifications:

Body material	: fiberglass reinforced thermoplastic with a good dielectric strength
Contacts	: fully captive, thermocouple material, third copper contact brass, jacks spring loaded, contacts polarized
Max. temperature rating	: 200 °C
Conductor diameter	: min. 0,12 mm max. 0,6 mm
Max. cable diameter	: 4,5 mm
Wire terminals	: screw type for quick wiring
Identification	: bodies colour marked to IEC or any other standard, polarity marks moulded into body
Accessories	: see reverse side

Ordering code:

Thermocouple type	Plug	IEC	Jack
Iron-constantan	CNN23100JBK	black	CNN24100JBK
Chromel-alumel	CNN23200KGR	green	CNN24200KGR
Copper-constantan	CNN23300TBR	brown	CNN24300TBR
PtRh-Pt	CNN23400SOR	orange	CNN24400SOR
Chromel-constantan	CNN23500EPL	violet	CNN24500EPL
Copper-copper	CNN23600BGY	grey	CNN24600BGY
Nicrosil-nisil	CNN23700NPK	pink	CNN24700NPK

3 PIN MINIATURE CONNECTOR

with thermocouple material contacts; 200 °C


Accessories for miniature 3 pin connectors

Bushing insert

Material : brass
Thermocouple ϕ : 1,6 mm or 3,2 mm

Ordering code


ϕ 1,6 mm : CNN29416
 ϕ 3,2 mm : CNN29432
blind : CNN29499



Wire clamp bracket

Material : stainless steel
Min. cable diameter : 2 mm

Ordering code : CNN-29400

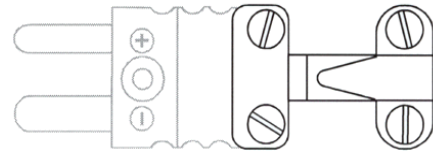

Each wire clamp bracket delivered with stainless steel mounting screws.