


RESISTANCE THERMOMETER INSERTS

450°C, DIN springloading

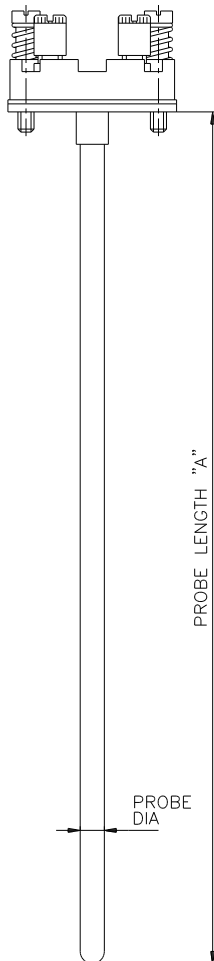

Specifications:

Series	: RTD-20.000
Probe type	: Wire wound sheathed construction
Temperature range	: -100 °C to +450 °C
Element type	: Pt 100, single or duplex (3 wire only)
Resistance values and tolerances	: IEC 60751, class B
Nom. resistance	: 100 Ohm at 0 °C
Recommended max. current	: 10 mA
Min. insulation resistance	: 100 MΩ at ambient temp. with 100 V DC
Wiring system	: 3- or 4-wires from the element
Termination	: ceramic DIN terminal block with clamp type terminals; fitted by means of two M4 screws on 33 mm centres
Max. springloading	: 10 mm
Sheath material	: SS 316 (Wst.nr. 1.4401)
Probe diameter	: 6,0 mm
Probe length 'A'	: to be specified; add 145 mm to 'U' length of series ITS-20.000 industrial temperature sensors

These inserts fit standard head assemblies series TSA-20.000 and standard industrial temperature sensors series ITS-20.000

Other ranges and/or classes for Pt100's are available on request.

Ordering code:

Wiring system

3-wire
4-wire

Single

RTD-20603-Pt100 - mm
RTD-20604-Pt100 - mm

Duplex

RTD-22606-Pt100 - mm

= probe length 'A' in mm (to be specified)