


# FLANGED BAR STOCK THERMOWELLS

with tapered stem

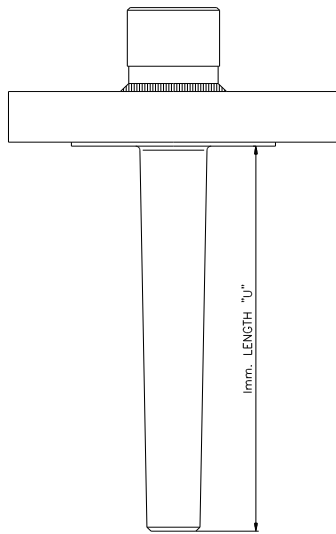

## Specifications:

Series	:TWE-23.000
Type	:tapered, from bar stock, flange welded on both sides to thermowell (un-machined)
Material	:SS 304 or SS 316
Internal thread	:1/2" NPT
Flange size, rating and material	:to be specified
Bar stock diameter	:32 mm
Stem diameter under flange	:22 mm
Tip diameter	19 mm $\begin{matrix} +0,5 \\ -0 \end{matrix}$
Surface finish	:1 $\mu$ m (40 Ru)
Bore	7 mm or 10 mm $\begin{matrix} +0,1 \\ -0,1 \end{matrix}$
Eccentricity	10% of wall thickness max.
Tip thickness	4 mm $\begin{matrix} +1,5 \\ -0 \end{matrix}$
Immersion length 'U'	:to be specified; replace box in ordering code with your required length
Total well length	:'U' plus 50 mm

Test wells can be supplied with brass or stainless steel plug and chain; please specify when ordering.

## Ordering code:

### Bore $\varnothing$

7 mm  
10 mm

### SS 304

'U' Flange  
TWE-23701 -  mm-  
TWE-23011 -  mm-

### SS 316

'U' Flange  
TWE-23702 -  mm-  
TWE-23012 -  mm-