


# PIPE CLAMP ADAPTERS

for spring loaded thermocouples

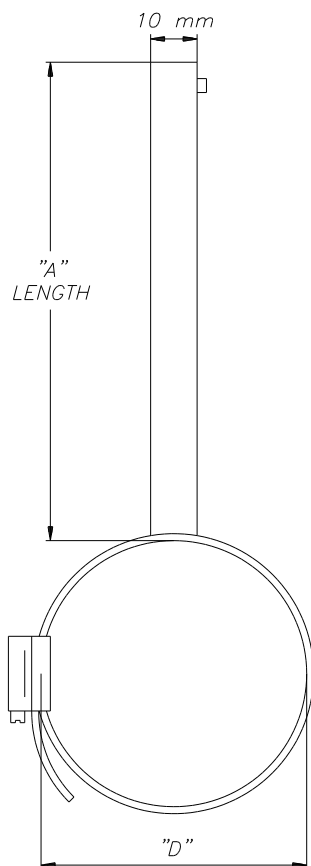

## Specifications:

|  |  |
|--|--|
| Material   | :stainless steel with zinc plated worm gear  |
| Length 'A'                                       | :to be specified; replace box in ordering code with your required length; our standard lengths are 50 mm, 100 mm and 150 mm ('A' length measured from top of adapter to surface of pipe) |
| Max. insulation thickness                        | :'A' length minus 15 mm  |
| Pipe diameter 'D'                                | :see ordering code   |
| Mounting method                                  | :place opened clamp around pipe, stick band-end into worm gear housing and tighten with screw driver;<br>for even faster response, pipe wall can be spot drilled with a 7 mm drill       |
| Thermocouple                                     | :see datasheet B/500 for types; immersion length 'A' to be specified (equal to 'A' length of adapter)  |
| Other 'A' length or pipe diameter also available |  |

## Ordering code:

| Pipe diameter 'D' |        | Ordering code  |
|-------------------|--------|----------------|
| Min.              | Max.   |                |
| 20 mm             | 32 mm  | MTS-93025-□ mm |
| 32 mm             | 50 mm  | MTS-93040-□ mm |
| 50 mm             | 70 mm  | MTS-93060-□ mm |
| 70 mm             | 90 mm  | MTS-93080-□ mm |
| 90 mm             | 110 mm | MTS-93100-□ mm |
| 110 mm            | 140 mm | MTS-93125-□ mm |
| 145 mm            | 180 mm | MTS-93160-□ mm |