


HIGH TEMP MINIATURE CONNECTOR

with thermocouple material contacts; 350 °C

Features:

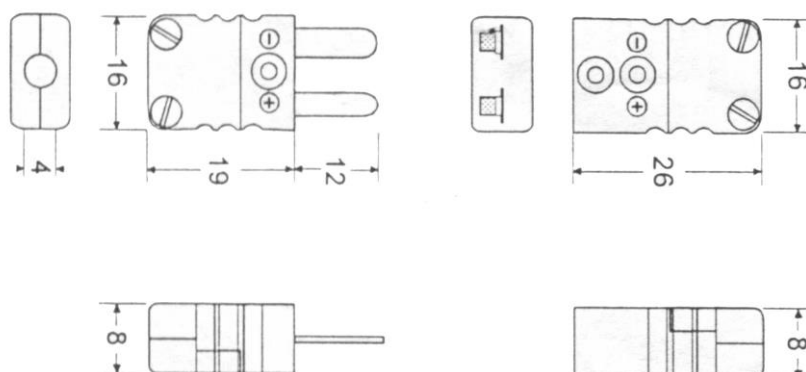

- Can be colour coded to any national standard
- Polarized pins ensure proper connection
- 350°C Rated

Specifications:

Body material	: fibreglass reinforced thermosetting plastic with a good dielectric strength
Contacts	: fully captive, thermocouple material, plug with flat pins, jacks spring loaded, contacts polarized
Max. temperature rating	: 350°C
Conductor diameter	: min. 0,12 mm Max 0,6 mm
Max. cable diameter	: 4,5 mm
Wire terminals	: screw type for quick wiring
Identification	: brown bodies, colour marked to IEC or any other standard, polarity mark moulded into body
Accessories	: see reverse side

Ordering code:

Thermocouple type	Plug	IEC	Jack	Plug	ANSI	Jack
Iron-constantan	CNN21130JBK	black	CNN22130JBK	CNN21130JBK	black	CNN22130JBK
Chromel-alumel	CNN21230KGR	green	CNN22230KGR	CNN21230KYL	yellow	CNN22230KYL
Copper-constantan	CNN21330TBR	brown	CNN22330TBR	CNN21330TBL	blue	CNN22330TBL
PtRh-Pt	CNN21430SOR	orange	CNN22430SOR	CNN21430SGR	green	CNN22430SGR
Chromel-constantan	CNN21530EPL	violet	CNN22530EPL	CNN21530EPL	violet	CNN22530EPL
Copper-copper*	CNN21630B	white	CNN22630BGY	CNN21630BWH	white	CNN22630BWH
Nicrosil-nisil	CNN21730NPK	pink	CNN22730NPK	CNN21730NOR	orange	CNN22730NOR

HIGH TEMP MINIATURE CONNECTOR

with thermocouple material contacts; 350 °C


Accessories for miniature 2 pin connectors

Bushing insert

Material : brass
Thermocouple ϕ : 1,6 mm or 3,2 mm

Ordering code


ϕ 1,6 mm : CNN29416
 ϕ 3,2 mm : CNN29432
blind : CNN29499



Wire clamp bracket

Material : stainless steel
Min. cable diameter : 2 mm

Ordering code : CNN-29400

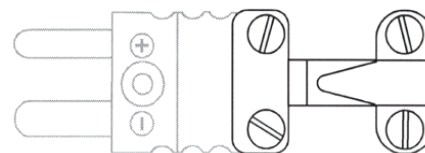

Each wire clamp bracket delivered with stainless steel mounting screws.