


3 PIN STANDARD PANEL

single circuit; 200 °C

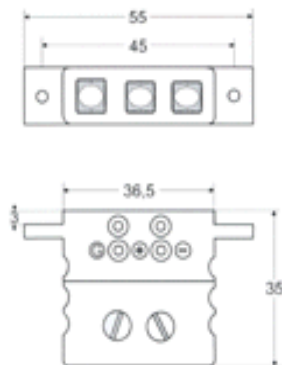

Specifications:

Construction	:	glass filled thermoplastic body (Lugged insert)
Panel dimensions	:	55 x 12,8 mm
Panel cut-out	:	36,6 x 12,9 mm
Depth behind panel	:	30 mm
Contacts	:	thermocouple material; third contact high purity copper
Max. temperature rating	:	200 °C
Max. conductor diameter	:	2 mm
Identification	:	inserts colour coded to IEC or any other standard on the front, polarity and ground sign identified at the rear of the insert
Mounting method	:	2 latching screws from the front
Mating connector	:	Thermo Electric's 3 pin standard plug; see datasheet I/113

Ordering code:

Thermocouple type	Complete panel	IEC	Complete panel	ANSI
Iron-constantan	PAN85101JBK	black	PAN85101JBK	black
Chromel-alumel	PAN85201GR	green	PAN85201KYL	yellow
Copper-constantan	PAN85301BR	brown	PAN85301BL	blue
PtRh-Pt	PAN85401SOR	orange	PAN85401SGR	green
Chromel-constantan	PAN85501EPL	violet	PAN85501EPL	violet
Copper-copper	PAN85601BGY	grey	PAN85601BWH	white
Nicrosil-nisil	PAN85701NPK	pink	PAN85701NOR	orange